




Open Joint

b)




1. Open Joint

가 가
 Open Joint Open Joint
 Open Joint Open Joint
 Open Joint 가

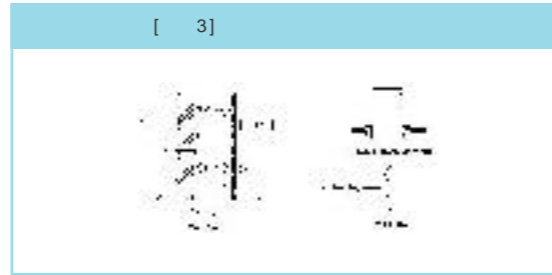


3.

가
 가

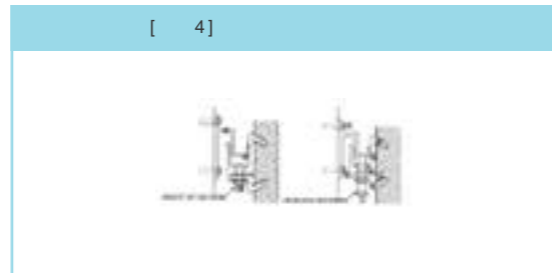


Runner : 2 가
 Runner :

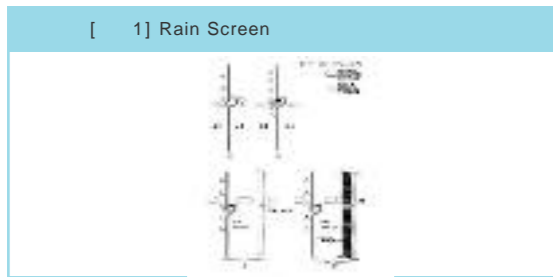

2.

a)

가

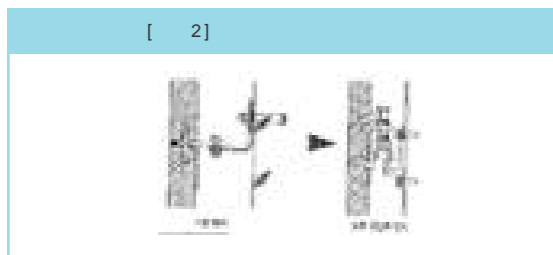

□

가

가
 Runner Notch



1.

[1]				
	0.4 mm	0.3 mm	0.004tc	0.0035tc
	0.006tc	0.005tc		
	0.005tc	0.004tc	-	-

) · tc :

mm

0.1

[2]

	가
	(가 , ,)

2.

[3] ()				
	0.4	0.4	0.6	0.2
	0.4	0.6	0.8	0.2
	0.6	0.8	1.0	0.2
(mm)	0.1	0.2	0.2	0.05
	0.1	0.2	0.3	0.05
	0.2	0.3	0.3	0.05

[4] (ACI 224R-90)

(Exposure condition)	(mm)	(Inch)
(Dry air or Protective Membrane)	0.41	0.016
(Humidity, Moist Air, Soil)	0.30	0.012
(Deicing Chemicals)	0.18	0.007
(Seawater and Seawater; Wetting and Drying)	0.15	0.006
(Water Retaining Structures)	0.10	0.004