



가 < 2> 2002 1

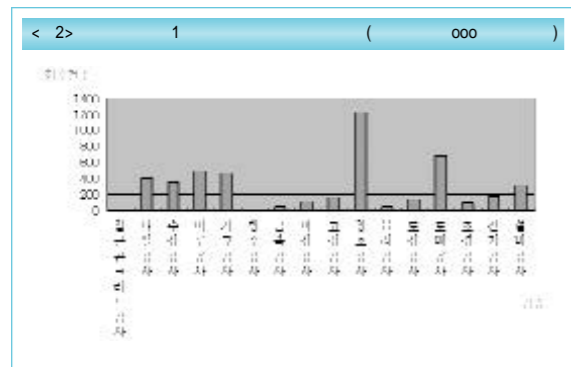


< 2> , , 가 , 가
6 1 가
5~8%

4.

4.1

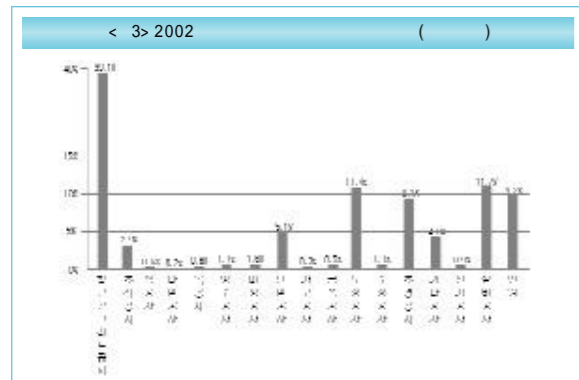

< 3> 가

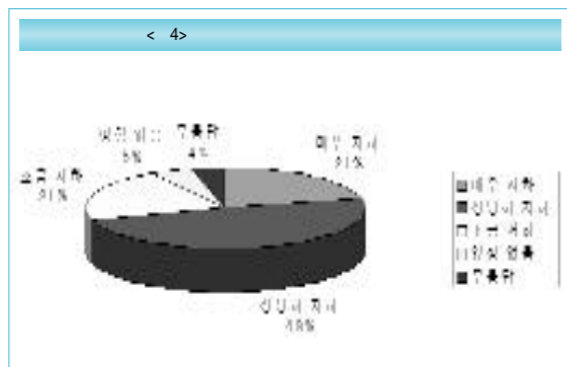

가
M/H
A/S

4.2

A/S
A/S
A/S

, M/H,

5.

가 A/S

가

A/S

가

A/S 가

D/B , 가



" ,2001) {
" ,2002) {

E/V

A/S
⌵
⌵

E/V

가
CON C laitance
form oil
con b

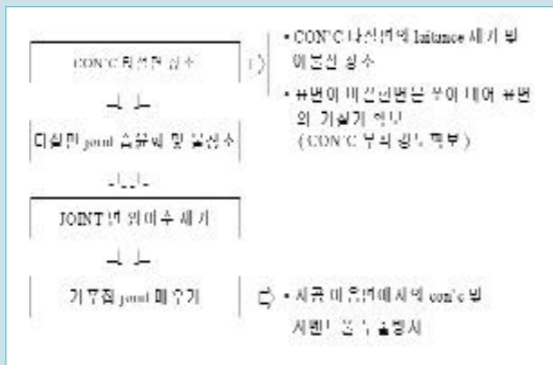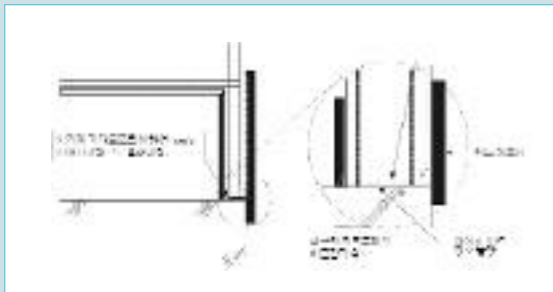

FORM OIL()


CON C
CON C (con b)
dry-out

[()]

| | | |
|------|----------|-----|
| conc | laitance | 45% |
| | | 93% |


con b

con b 가
가

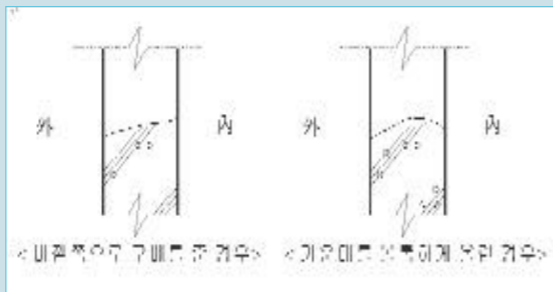


E/V

가
가
가

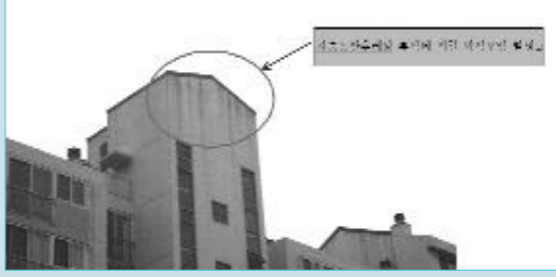

가
가 (-1.1V) (99.9%:-0.2V)
가 : 0.1V

가 (0.1V)

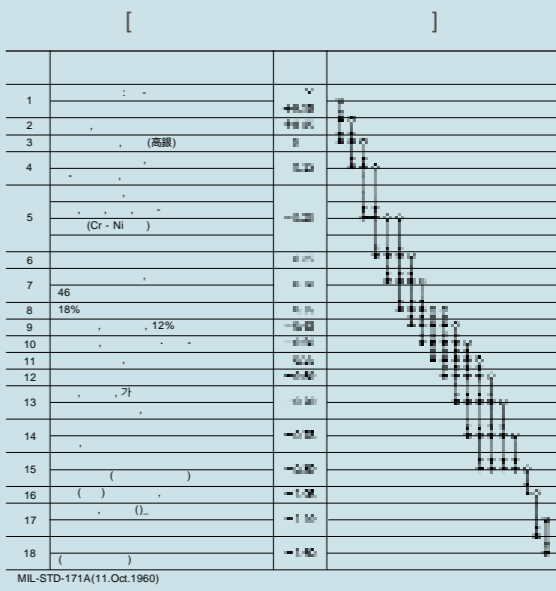

() 0.1V

Ex) vs : -1.1V vs -0.2V = 0.9V(9)

_ 02 - 3433 - 7182 _ fourmu@ssyenc.com

- 1. (2mm)
- ()
- APP.SLAB (2mm)
- 3 ~ 5m Saw
- 2. JOINT
- Saw
- EX-JOINT ()
- APP.SLAB Saw
- 가
- JOINT 가
- 가

